

Ceiling Recessed Downlight


Comfort Series

VXDL001R-55 trimless 7W



Technical Parameters:

Name	Parameters
Light source:	COB
Power	7W
Input Voltage:	AC220~240V 50/60Hz
LED Current:	180mA, 36V
CRI	90
Beam Angle	15°/24°/36°
CCT	2700K/3000K/4000K
Certificate:	CE/RoHS
LED Brand	Bridgelux
Powersupply	LIFUD

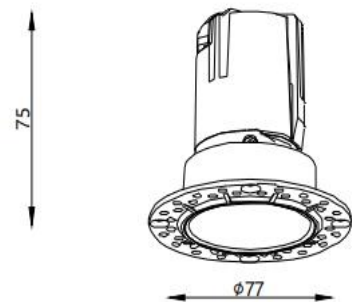

Φ55

Fixture Characteristics

Name	Parameters
Material	Aluminium
Environment	INDOOR
Protection	IP20
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Tilting Angle	30°
Rotational Angle	350°
Dimensions	Size:Ø55x75mm Cut-out:Ø55mm
Finished Color	Sand White/Black