

Down light


General downlight series

VXDL004-140 (30W)



Technical Parameters:

Name	Parameters
Light source:	SMD
Power	30W
Input Voltage:	AC220~240V 50/60Hz
LED Current:	750mA, 36V
CRI	80
Beam Angle	>60°
CCT	3000K/4000K
Certificate:	CE/RoHS
LED Brand	OSRAM
Powersupply	LIFUD

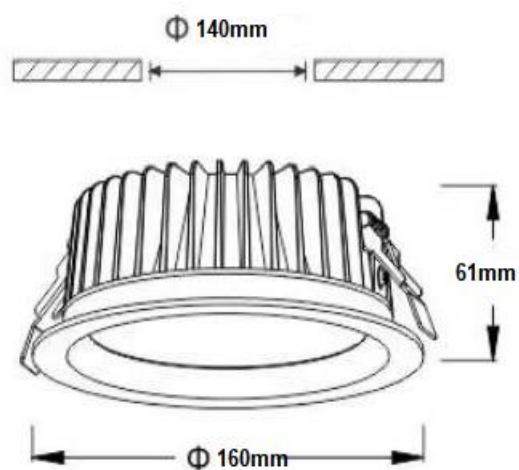

Fixture Characteristics

Name	Parameters
Material	Aluminium
Environment	INDOOR
Protection	IP20
Operating	-20°C~40°C
Storage temperature:	-30°C~60°C
Tilting Angle	\
Rotational Angle	\
Dimensions	$\phi 160 \times 61$ cut-out $\phi 140$
Finished Color	Sand White/Black