

Surface mounted


Defender series

VXCM010-2 10Wx2



Technical Parameters:

Name	Parameters
Light source:	COB/GU10
Power	10Wx2(COB ver)
Input Voltage:	AC220~240V 50/60Hz
LED Current:	250mA, 36V
CRI	90/80
Beam Angle	15°/24°/36°/60°
CCT	3000K/4000K
Certificate:	CE/RoHS
LED Brand	Bridgelux
Powersupply	EAGLERISE

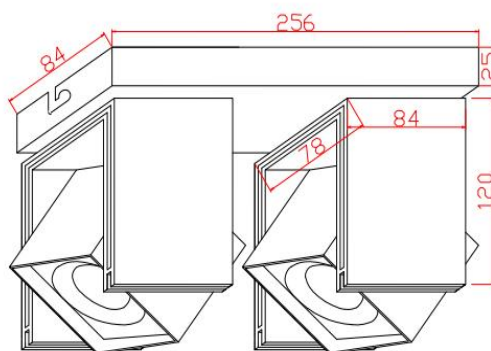

Fixture Characteristics

Name	Parameters
Material	Aluminium
Environment	INDOOR
Protection	IP20
Operating	-20°C~40°C
Storage temperature:	-30°C~60°C
Tilting Angle	0°-90°
Rotational Angle	0°-350°
Dimensions	256*84*H145mm
Finished Color	Sand White/Black