

Down light


Anti glare series

VXDL002-125 (24W)



Technical Parameters:

Name	Parameters
Light source:	COB/SMD
Power	24W
Input Voltage:	AC220~240V 50/60Hz
LED Current:	600mA, 36V
CRI	90/80
Beam Angle	24°/50°/60°
CCT	3000K/4000K
Certificate:	CE/RoHS
LED Brand	Bridgelux/OSRAM
Powersupply	LIFUD

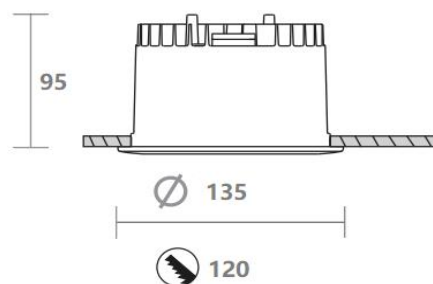

Fixture Characteristics

Name	Parameters
Material	Aluminium
Environment	INDOOR
Protection	IP54
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Tilting Angle	\
Rotational Angle	\
Dimensions	φ135*95 cut-out φ120
Finished Color	Sand White/Black