

Down light


Anti glare series

VXDL002-175 (42W)



Technical Parameters:

Name	Parameters
Light source:	COB/SMD
Power	42W
Input Voltage:	AC220~240V 50/60Hz
LED Current:	1050mA, 36V
CRI	90/80
Beam Angle	24°/50°/60°
CCT	3000K/4000K
Certificate:	CE/RoHS
LED Brand	Bridgelux/OSRAM
Powersupply	LIFUD

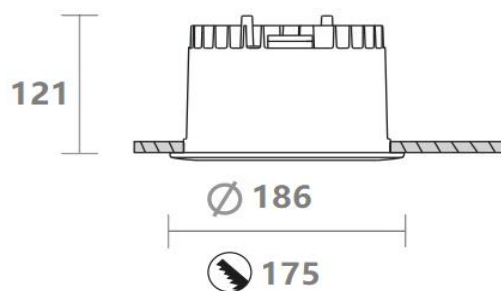

Fixture Characteristics

Name	Parameters
Material	Aluminium
Environment	INDOOR
Protection	IP54
Operating	-20℃~40℃
Storage temperature:	-30℃~60℃
Tilting Angle	\
Rotational Angle	\
Dimensions	φ186*121 cut-out φ175
Finished Color	Sand White/Black